

# TC-NC23V

## 2MP Varifocal IR Bullet Camera


# Tiandy



### Features

- Up To 1080P, 1920x1080@30fps
- H.264/M-JPEG Codec
- Min. Illumination Color: 0.5 Lux, B/W: 0.25Lux, 0 Lux with IR
- Manual 2.8-12mm
- Smart IR, IR Range: 50m
- VCA Tripwire/Perimeter
- Interface Audio I/O:1/1, Alarm I/O:1/0, Micro SD card slot up to 128G, USB, Reset Button
- TVS 6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V), IP67
- Operating Conditions -35℃ ~ 60℃ (IR OFF) / -35℃ ~ 40℃ (IR ON), 0 ~ 95% RHG
- CE, FCC

### Dimensions

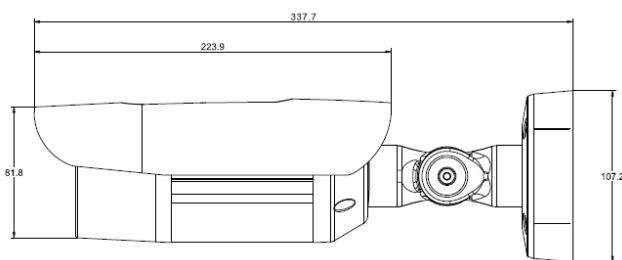

Camera	
Image Sensor	1/2.8" CMOS
Core Processor	ARM9 Architecture
Operating System	Embedded Linux
Signal System	PAL/NTSC
Min. Illumination	Color: 0.5 Lux @(F1.2, AGC ON) B/W: 0.25Lux @(F1.2, AGC ON); 0 Lux with IR
Shutter Time	1s to 1/100,000s
Lens	2.8-12mm, Angle of View: 88.1°~31.2°
Lens Mount	φ14
Auto Iris	N/A
Day& Night	IR Cut Filter with Auto Switch
WDR	100 dB
DNR	3D
Focus	Manual
S/N Ratio	>60dB
Compression Standard	
Video Compression	H.264/MJPEG
Video Bit Rate	32Kbps~16Mbps
Audio Compression	G.711AG.711U/ADPCM
Audio Bit Rate	G711 8KHz, 64kbps ADPCM 8KHz, 32kbps
Image	
Max. Image Resolution	1920x1080
Frame Rate	50Hz 25fps (1920 × 1080), 25fps (1280 × 720) 60Hz 30fps (1920 × 1080), 30fps (1280 × 720)
Triple Stream	Mainstream:1080P(1920*1080) Substream:D1(704*576) 3rd stream:CIF(352*288)
Image Settings	Brightness, Saturation, Contrast, Flip Mode Adjustable by Client Software or Web Browser
HLC	Y
Smart Defog	Y
Corridor Format	Y, Available for 720P and Above
EIS	Y
ROI	4 Zones
Privacy Mask	4 Zones
Picture Overlay	200 × 200, BMP 24bit, Zone Configurable
OSD	Size:16×16, 32×32, 24×24, 48×48, 64×64, 96×96 Letters, Week, Date, Time, Total 5 Regions
Network	
Browser	CHROME V45 or lower, IE, FIREFOX
Network Storage	FTP
NTP	Y
ANR	Y
Video Analytics	Tripwire/Perimeter
Alarm Trigger	Motion Detection/IP Conflict/MAC Conflict/Port Alarm/Mask Alarm
Protocols	IPv4/IPv6/HTTP/802.1x/FTP/SNMP/UPnP/SNMP/DNS/DDNS/NTP/RTSP/TCP/UDP/DHCP/PPPoE/HTTPS/ARP/RTP/QoS/MULTICAST/ICMP/IGMP
User Permission	4 Level/8 Users
Remote Connection	3 Users Access at the Same Time
System Compatibility	ONVIF (Profile S), SDK
Interface	
Audio Input	1-ch
Audio Output	1-ch
Communication Interface	1-ch RJ45 10M / 100M Ethernet Interface
Alarm Input	1-ch
Alarm Output	N/A
Video Output	N/A
On-board Storage	MicroSD Card Slot, up to 128GB
Reset Button	Y
Extension	1x USB
General	
Language	English, Spanish, Korean, Italian, Turkish, Thai, Russian Polish, French, Traditional Chinese, Simplified Chinese
Operating Conditions	-35℃ ~ 60℃ (IR OFF) / -35℃ ~ 40℃ (IR ON), 0 ~ 95% RHG
Power Supply	DC 12 V ± 10%, PoE (802.3af)
Power Consumption	Max. 5W (IR OFF) (ICR Instant Switch 12W) Max. 7.5W (IR ON)
Circuit Protection	TVS 6000V, Lightning/Surge Protection: (Power 2000V, RJ45 1000V)
Impact Protection	IP67
IR Range	50m
IR LEDs	54pcs
Dimensions	337mm×107mm×107mm
Weight	1.3KG (IP Camera Only); 1.6KG (with Packing Box)
ANR:	Auto store video in SD card when NVR disconnected, and upload video to NVR when resumed connection (Only Support Tiandy ANR NVR)

\* The latest product information / specification can be found at <http://en.tiandy.com/>

